



PASSENGER &
LIGHT TRUCK TIRE
CATALOG


REV 23.01

ROVELO 
TIRE

PASSENGER & LIGHT TRUCK TIRE CATALOG

HP / UHP / SUV / LT / 4S / WINTER TIRE



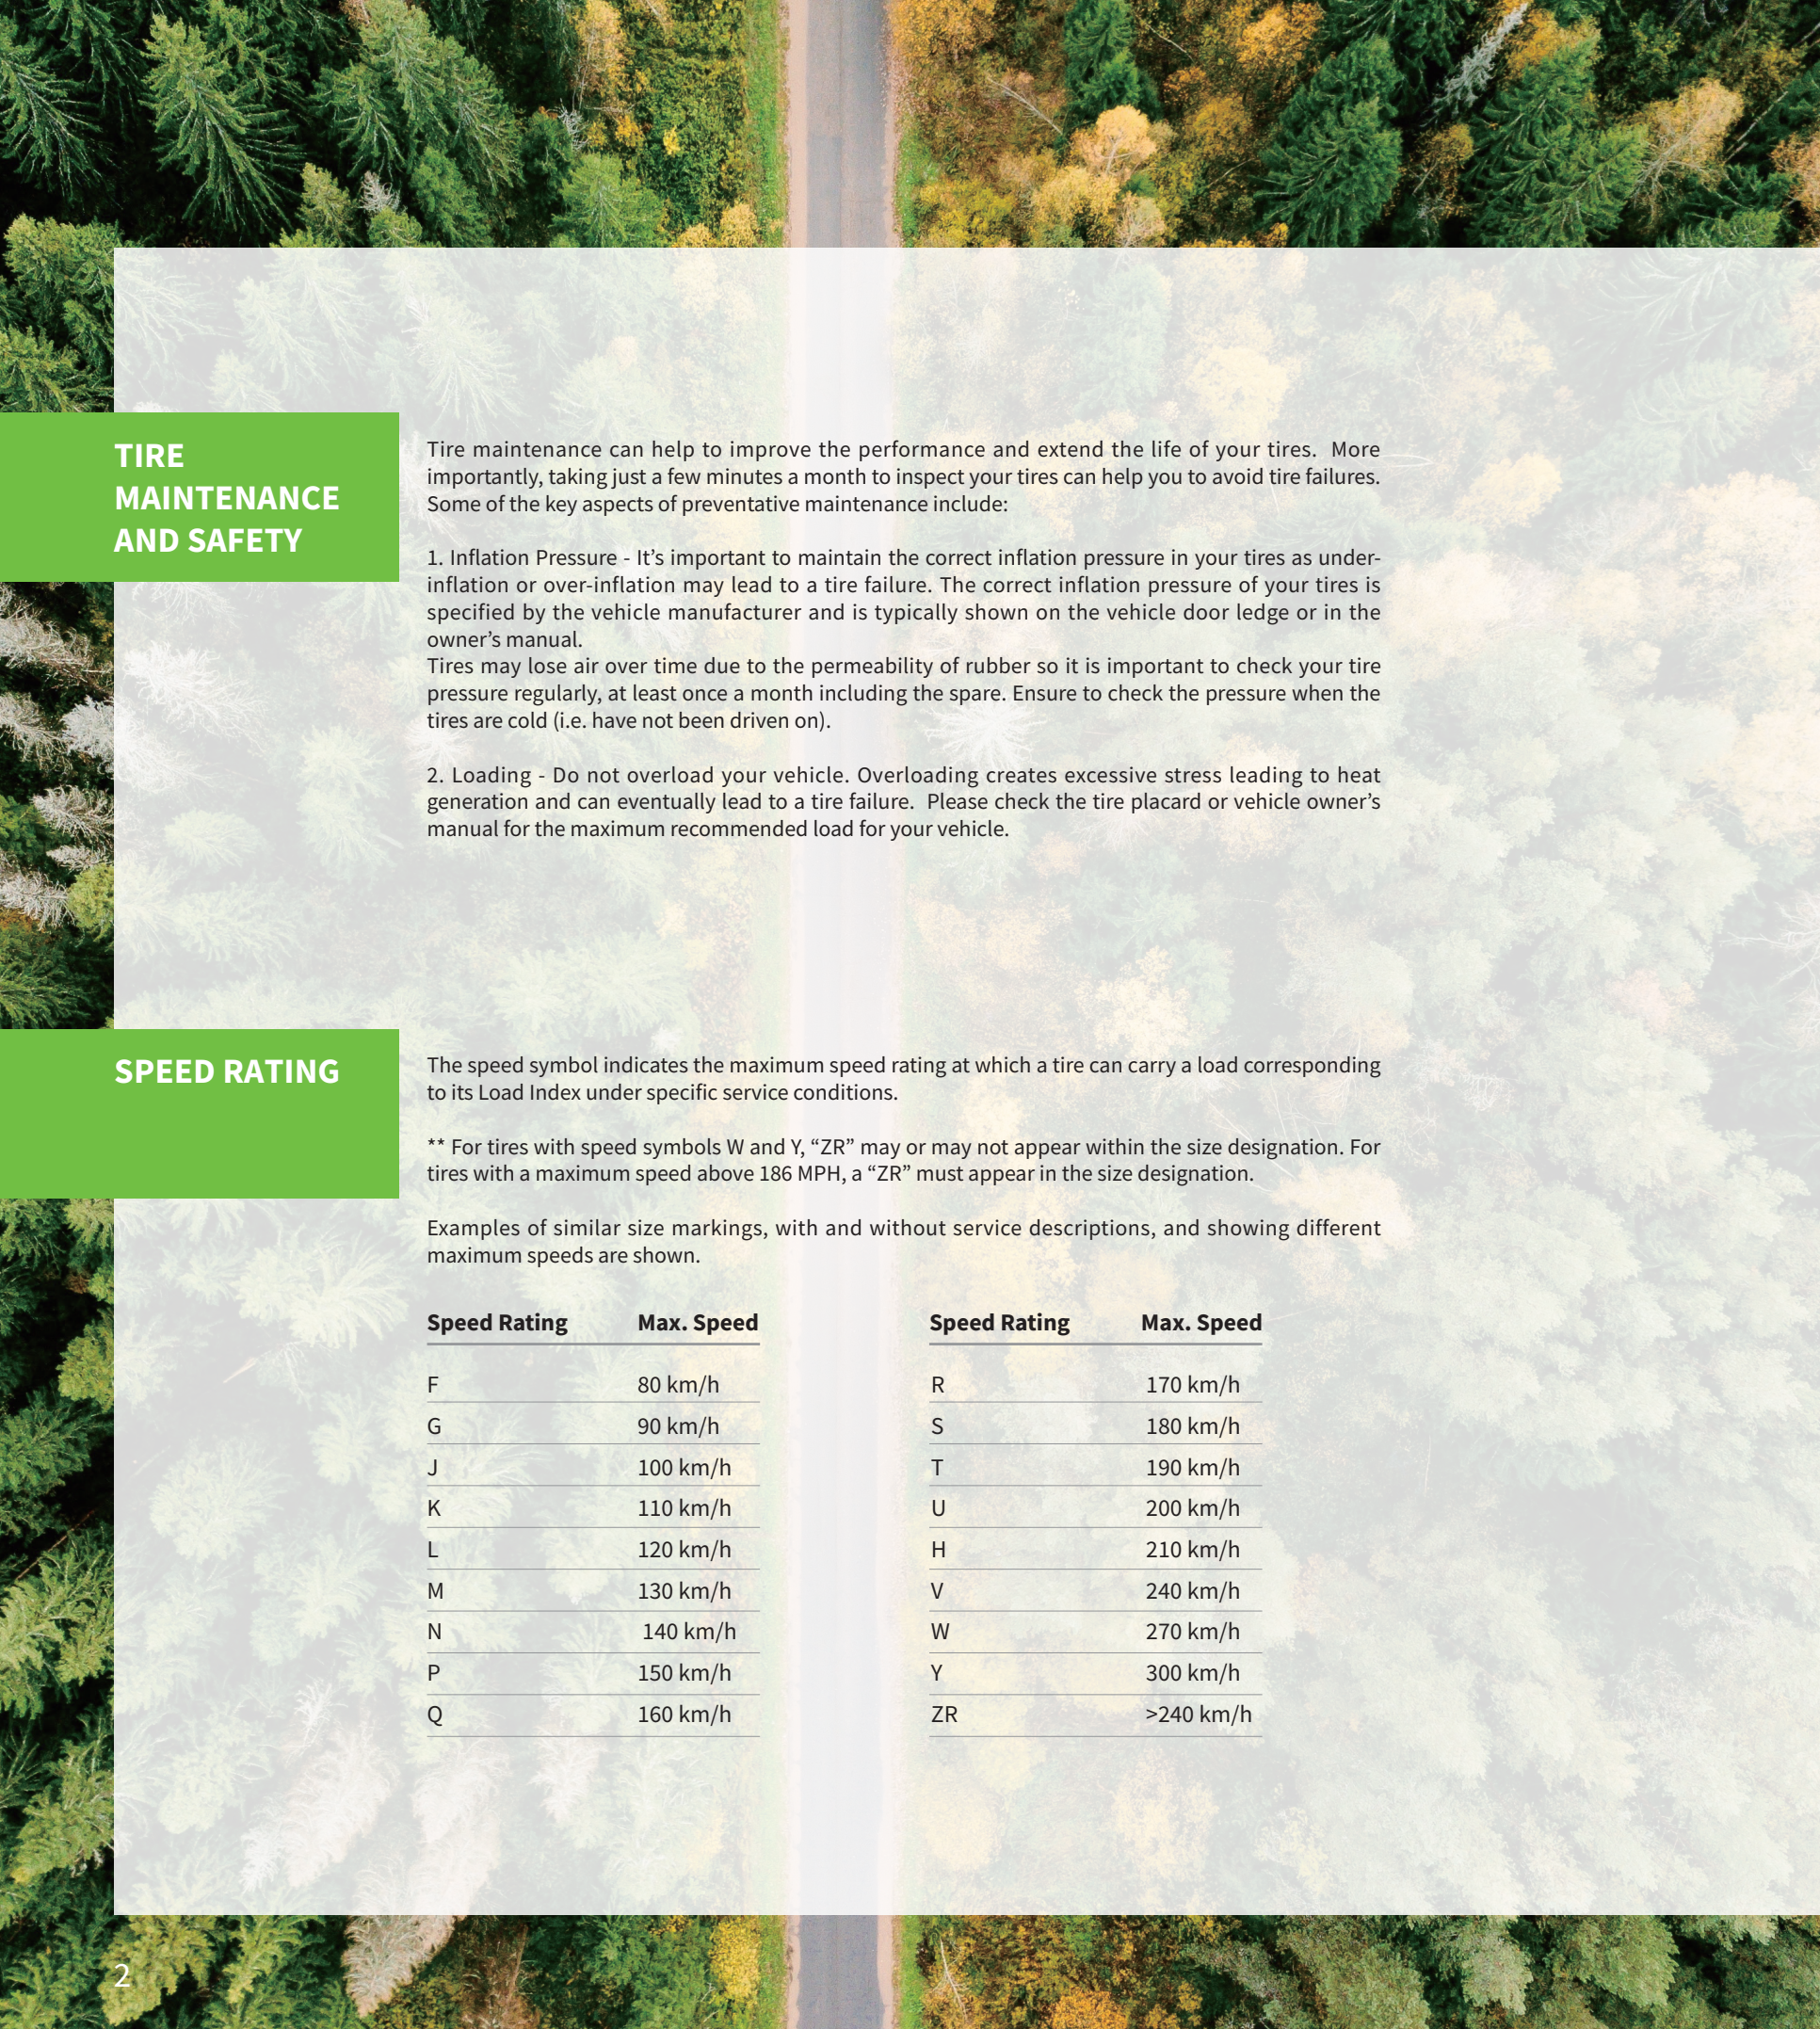

TIRE
MAINTENANCE
AND SAFETY

Tire maintenance can help to improve the performance and extend the life of your tires. More importantly, taking just a few minutes a month to inspect your tires can help you to avoid tire failures. Some of the key aspects of preventative maintenance include:

- 1. Inflation Pressure - It's important to maintain the correct inflation pressure in your tires as under-inflation or over-inflation may lead to a tire failure. The correct inflation pressure of your tires is specified by the vehicle manufacturer and is typically shown on the vehicle door ledge or in the owner's manual. Tires may lose air over time due to the permeability of rubber so it is important to check your tire pressure regularly, at least once a month including the spare. Ensure to check the pressure when the tires are cold (i.e. have not been driven on).
- 2. Loading - Do not overload your vehicle. Overloading creates excessive stress leading to heat generation and can eventually lead to a tire failure. Please check the tire placard or vehicle owner's manual for the maximum recommended load for your vehicle.

SPEED RATING

The speed symbol indicates the maximum speed rating at which a tire can carry a load corresponding to its Load Index under specific service conditions.

** For tires with speed symbols W and Y, "ZR" may or may not appear within the size designation. For tires with a maximum speed above 186 MPH, a "ZR" must appear in the size designation.

Examples of similar size markings, with and without service descriptions, and showing different maximum speeds are shown.

Speed Rating	Max. Speed
F	80 km/h
G	90 km/h
J	100 km/h
K	110 km/h
L	120 km/h
M	130 km/h
N	140 km/h
P	150 km/h
Q	160 km/h

Speed Rating	Max. Speed
R	170 km/h
S	180 km/h
T	190 km/h
U	200 km/h
H	210 km/h
V	240 km/h
W	270 km/h
Y	300 km/h
ZR	>240 km/h

TABLE OF
CONTENTS

PASSENGER

SUMMER	RHP-A68	4
	INSTINCT AS01	8
	RPX-988	12
	SPORT A1	16
	ROAD RACER R1	20
ALL SEASON	RHP-780	22
	RHP-780P	24
	ALL WEATHER R4S	26
WINTER	RWS-677 STUDDABLE	28
	RWT-768 STUDLESS	32

SUV/4X4

ON ROAD	ROAD QUEST H/T	34
	MONTARE HT RV08	36
4X4/OFF ROAD	ROAD QUEST AT	38
	RIDGETRAK AT	40
	ROAD QUEST RMT-810	42

VAN / COMMERCIAL

SUMMER	RCM-836	44
	RCM-X+	46
	MONTARE LT RL02	48



RHP-A68



Asymmetrical Tread Pattern
Provides excellent cornering stability while maintaining superior wet traction.



Tread Sipes
Drastically improve braking in all weather conditions.



Reinforced Shoulder Ribs
Engineered for high-speed cornering while extending tread life.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
12	155/70R12		73	T		BSW	4.50B	460/A/B	365	300	VN
13	165/60R13		73	H		BSW	5.00B	420/A/A	365	300	VN
13	155/65R13		73	T		BSW	4.50B	460/A/B	365	300	VN
13	155/70R13		75	T		BSW	4.50B	460/A/B	387	300	VN
13	165/70R13		79	T		BSW	5.00B	460/A/B	437	300	VN
13	175/70R13		82	T		BSW	5.00B	460/A/B	475	300	VN
13	185/70R13		86	T		BSW	5.50B	460/A/B	530	300	VN
14	165/55R14		72	V		BSW	5J	420/A/A	355	300	VN
14	165/60R14		75	H		BSW	5J	420/A/A	387	300	VN
14	185/60R14		82	H		BSW	5 1/2J	420/A/A	475	300	VN
14	165/65R14		79	T		BSW	5J	460/A/B	437	300	VN
14	175/65R14		82	H		BSW	5J	420/A/A	475	300	VN
14	185/65R14		86	H		BSW	5 1/2J	420/A/A	530	300	VN
14	195/65R14		89	H		BSW	6J	420/A/A	580	300	VN
14	165/70R14		81	T		BSW	5J	460/A/B	462	300	VN
14	175/70R14		84	T		BSW	5J	460/A/B	500	300	VN
14	185/70R14		88	H		BSW	5 1/2J	460/A/B	560	300	VN
14	195/70R14		91	H		BSW	6J	460/A/B	615	300	VN
14	205/70R14		95	T		BSW	6J	460/A/B	690	300	VN




RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	165/50R15		72	V		BSW	5J	420/A/A	355	300	VN
15	175/50R15		75	V		BSW	5 1/2J	420/A/A	387	300	VN
15	195/50R15		82	H		BSW	6J	420/A/A	475	300	VN
15	185/55R15		82	H		BSW	6J	420/A/A	475	300	VN
15	195/55R15		85	H		BSW	6J	420/A/A	515	300	VN
15	185/60R15		84	H		BSW	5 1/2J	420/A/A	500	300	VN
15	195/60R15		88	V		BSW	6J	420/A/A	560	300	VN
15	205/60R15		91	V		BSW	6J	420/A/A	615	300	VN
15	225/60R15		96	H		BSW	6 1/2J	420/A/A	710	300	VN
15	185/65R15		88	H		BSW	5 1/2J	420/A/A	560	300	VN
15	195/65R15		91	H		BSW	6J	420/A/A	615	300	VN
15	205/65R15		94	V		BSW	6J	420/A/A	670	300	VN
15	205/70R15		96	T		BSW	6J	460/A/B	710	300	VN
15	215/70R15		98	T		BSW	6 1/2J	460/A/B	750	300	VN

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
16	195/50R16		84	V		BSW	6J	420/A/A	500	300	VN
16	195/55R16		87	H		BSW	6J	420/A/A	545	300	VN
16	205/55R16		91	V		BSW	6 1/2J	420/A/A	615	300	VN
16	205/60R16		96	V	XL	BSW	6J	420/A/A	710	340	VN
16	215/60R16		99	V	XL	BSW	6 1/2J	420/A/A	775	340	VN
16	225/60R16		98	H		BSW	6 1/2J	420/A/A	750	300	VN
16	205/65R16		95	H		BSW	6J	420/A/A	690	300	VN
16	215/65R16		98	T		BSW	6 1/2J	460/A/B	750	300	VN
17	215/50R17		95	V	XL	BSW	7J	420/A/A	690	340	VN
17	215/55R17		94	V		BSW	7J	420/A/A	670	300	VN
17	215/60R17		96	T		BSW	6 1/2J	460/A/B	710	300	VN
17	225/60R17		99	T		BSW	6 1/2J	460/A/B	775	300	VN
18	225/45ZR18		95	W	XL	BSW	7 1/2J	360/A/A	690	340	VN

HIGH PERFORMANCE

ROVELO
TIRE

INSTINCT AS01




Long Mileage

The special all-weather tread compound is designed to offer exceptional wear and cut resistance while the upgraded tire contour and varying tread block angles are optimized to promote even wear. This combination of designs provides overall extended mileage.



Driving Comfort

Tread Variable pitch tread blocks are optimized with 5 variations and are equipped with sound-dampening sipes that improve handling and reduce noise emissions.



Handling Stability

The wide central ribs and improved contour design improve handling stability by evenly distributing ground pressure and increase the tire footprint.



All-Weather Performance

The tread rubber compound is durable and designed to perform in a full range of temperatures while tread sipes help to break through water film for improved braking performance.



HIGH PERFORMANCE

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
14	175/65R14		86	T	XL	BSW	5J	420/A/A	530	340	VN
14	185/65R14		86	H		BSW	5 1/2J	420/A/A	530	300	VN
14	175/70R14		84	T		BSW	5J	420/A/A	500	300	VN
14	195/70R14		91	T		BSW	6J	420/A/A	615	300	VN
15	175/55R15		77	H		BSW	5 1/2J	420/A/A	412	300	VN
15	185/55R15		82	V		BSW	6J	420/A/A	475	300	VN
15	185/60R15		88	H	XL	BSW	5 1/2J	420/A/A	560	340	VN
15	195/60R15		88	H		BSW	6J	420/A/A	560	300	VN
15	205/60R15		95	H	XL	BSW	6J	420/A/A	690	340	VN
15	175/65R15		84	H		BSW	5J	420/A/A	500	300	VN
15	185/65R15		92	H	XL	BSW	5 1/2J	420/A/A	630	340	VN
15	195/65R15		91	H		BSW	6J	420/A/A	615	300	VN
15	205/65R15		94	H		BSW	6J	420/A/A	670	300	VN
15	205/70R15		96	T		BSW	6J	420/A/A	710	300	VN
15	215/70R15		98	T		BSW	6 1/2J	420/A/A	750	300	VN
16	195/50R16		84	V		BSW	6J	420/A/A	500	300	VN
16	205/50R16		87	H		BSW	6 1/2J	420/A/A	545	300	VN
16	195/55R16		87	H		BSW	6J	420/A/A	545	300	VN
16	205/55R16		91	H		BSW	6 1/2J	420/A/A	615	300	VN
16	215/55R16		97	H	XL	BSW	7J	420/A/A	730	340	VN
16	205/60R16		92	H		BSW	6J	420/A/A	630	300	VN
16	215/60R16		95	H		BSW	6 1/2J	420/A/A	690	300	VN
16	225/60R16		98	H		BSW	6 1/2J	420/A/A	750	300	VN
16	235/60R16		100	V		BSW	7J	420/A/A	800	300	VN
16	205/65R16		95	H		BSW	6J	420/A/A	690	300	VN


RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
16	215/65R16		98	T		BSW	6 1/2J	420/A/A	750	300	VN
16	225/65R16		100	H		BSW	6 1/2J	420/A/A	800	300	VN
16	235/65R16		103	T		BSW	7J	420/A/A	875	300	VN
17	215/45R17		87	W		BSW	7J	420/A/A	545	300	VN
17	225/45R17		91	V		BSW	7 1/2J	420/A/A	615	300	VN
17	235/45R17		97	W	XL	BSW	8J	420/A/A	730	340	VN
17	205/50R17		89	V		BSW	6 1/2J	420/A/A	580	300	VN
17	215/50R17		91	V		BSW	7J	420/A/A	615	300	VN
17	225/50R17		94	V		BSW	7J	420/A/A	670	300	VN
17	215/55R17		94	V		BSW	7J	420/A/A	670	300	VN
17	225/55R17		97	V		BSW	7J	420/A/A	730	300	VN
17	235/55R17		99	V		BSW	7 1/2J	420/A/A	775	300	VN
17	215/60R17		96	T		BSW	6 1/2J	420/A/A	710	300	VN
17	225/60R17		99	H		BSW	6 1/2J	420/A/A	775	300	VN
17	215/65R17		99	T		BSW	6 1/2J	420/A/A	775	300	VN
17	225/65R17		102	T		BSW	6 1/2J	420/A/A	850	300	VN
18	225/40R18		92	W	XL	BSW	8J	420/A/A	630	340	VN
18	245/40R18		97	W	XL	BSW	8 1/2J	420/A/A	730	340	VN
18	235/45R18		94	V		BSW	8J	420/A/A	670	300	VN
18	245/45R18		100	W	XL	BSW	8J	420/A/A	800	340	VN
18	225/50R18		95	H		BSW	7J	420/A/A	690	300	VN
18	235/50R18		97	V		BSW	7 1/2J	420/A/A	730	300	VN
18	235/55R18		100	V		BSW	7 1/2J	420/A/A	800	300	VN
18	235/60R18		103	H		BSW	7J	420/A/A	875	300	VN
19	235/55R19		105	V	XL	BSW	7 1/2J	420/A/A	925	340	VN



RPX-988



Asymmetrical Tread Pattern
Provides excellent cornering stability while maintaining superior wet traction.



Multi-Dimensional Rib Sipes
Drastically improves braking in all weather conditions.



Reinforced Shoulder Ribs
Engineered for high-speed cornering while extending tread life.



Wavy Tread Sipes
Reduces vibrations for improved driving comfort.



RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	195/45R15		78	V		BSW	6 1/2J	340/A/A	425	300	CN
16	195/45R16		84	V	XL	BSW	6 1/2J	340/A/A	500	340	CN
16	205/45R16		87	Y	XL	BSW	7J	340/A/A	545	340	CN
16	205/50ZR16		87	W		BSW	6 1/2J	340/A/A	545	300	CN
16	205/55ZR16		91	W		BSW	6 1/2J	340/A/A	615	300	CN
16	215/55ZR16		97	W	XL	BSW	7J	340/A/A	730	340	CN
16	225/55ZR16		99	W	XL	BSW	7J	340/A/A	775	340	CN
17	205/40ZR17		84	Y	XL	BSW	7 1/2J	340/A/A	500	340	CN
17	215/40ZR17		87	W	XL	BSW	7 1/2J	340/A/A	545	340	CN
17	215/40ZR17		87	Y	XL	BSW	7 1/2J	340/A/A	545	340	CN
17	245/40ZR17		95	Y	XL	BSW	8 1/2J	340/A/A	690	340	CN
17	205/45ZR17		88	Y	XL	BSW	7J	340/A/A	560	340	CN
17	215/45ZR17		91	W	XL	BSW	7J	340/A/A	615	340	CN
17	215/45ZR17		91	Y	XL	BSW	7J	340/A/A	615	340	CN
17	225/45ZR17		94	W	XL	BSW	7 1/2J	340/A/A	670	340	CN
17	225/45ZR17		94	Y	XL	BSW	7 1/2J	340/A/A	670	340	CN
17	235/45ZR17		97	W	XL	BSW	8J	340/A/A	730	340	CN
17	235/45ZR17		97	Y	XL	BSW	8J	340/A/A	730	340	CN
17	245/45ZR17		99	Y	XL	BSW	8J	340/A/A	775	340	CN
17	205/50ZR17		93	W	XL	BSW	6 1/2J	340/A/A	650	340	CN
17	215/50ZR17		95	W	XL	BSW	7J	340/A/A	690	340	CN
17	225/50ZR17		98	W	XL	BSW	7J	340/A/A	750	340	CN
17	215/55ZR17		98	W	XL	BSW	7J	340/A/A	750	340	CN
17	225/55R17		101	V	XL	BSW	7J	340/A/A	825	340	CN

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
17	225/55ZR17		101	W	XL	BSW	7J	340/A/A	825	340	CN
17	235/55ZR17		99	W		BSW	7 1/2J	340/A/A	775	300	CN
18	215/35ZR18		84	Y	XL	BSW	7 1/2J	340/A/A	500	340	CN
18	255/35ZR18		94	W	XL	BSW	9J	340/A/A	670	340	CN
18	255/35ZR18		94	Y	XL	BSW	9J	340/A/A	670	340	CN
18	225/40ZR18		92	W	XL	BSW	8J	340/A/A	630	340	CN
18	225/40ZR18		92	Y	XL	BSW	8J	340/A/A	630	340	CN
18	235/40ZR18		95	W	XL	BSW	8 1/2J	340/A/A	690	340	CN
18	235/40ZR18		95	Y	XL	BSW	8 1/2J	340/A/A	690	340	CN
18	245/40ZR18		97	Y	XL	BSW	8 1/2J	340/A/A	730	340	CN
18	225/45ZR18		95	W	XL	BSW	7 1/2J	340/A/A	690	340	CN
18	225/45ZR18		95	Y	XL	BSW	7 1/2J	340/A/A	690	340	CN
18	245/45ZR18		100	W	XL	BSW	8J	340/A/A	800	340	CN
18	245/45ZR18		100	Y	XL	BSW	8J	340/A/A	800	340	CN
19	235/35ZR19		91	W	XL	BSW	8 1/2J	340/A/A	615	340	CN
19	235/35ZR19		91	Y	XL	BSW	8 1/2J	340/A/A	615	340	CN
19	255/35ZR19		96	Y	XL	BSW	9J	340/A/A	710	340	CN
19	245/40ZR19		98	W	XL	BSW	8 1/2J	340/A/A	750	340	CN
19	245/45ZR19		98	W		BSW	8J	340/A/A	750	300	CN
20	245/35ZR20		95	W	XL	BSW	8 1/2J	340/A/A	690	340	CN
20	245/35ZR20		95	Y	XL	BSW	8 1/2J	340/A/A	690	340	CN
20	255/35ZR20		97	W	XL	BSW	9J	340/A/A	730	340	CN
20	255/35ZR20		97	Y	XL	BSW	9J	340/A/A	730	340	CN
20	245/45ZR20		103	W	XL	BSW	8J	340/A/A	875	340	CN


ULTRA HIGH PERFORMANCE

ROVELO
TIRE




ULTRA HIGH PERFORMANCE TIRE

SPORT A1




Asymmetrical Tread Pattern

Provides excellent cornering stability while maintaining superior wet traction.



Groove Design

Efficiently drains water for safer driving on wet roads.



Shoulder Groove Design

Wave-like design on the shoulder helps reduce noise emissions and increases cornering capabilities.



RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	195/50R15		82	V		BSW	6J	340/A/A	475	300	VN
15	195/55R15		85	V		BSW	6J	340/A/A	515	300	VN
16	205/45ZR16		87	W	XL	BSW	7J	340/A/A	545	340	KH
16	195/50R16		88	V	XL	BSW	6J	340/A/A	560	340	VN
16	205/50R16		87	V		BSW	6 1/2J	340/A/A	545	300	KH
16	205/55R16		91	W		BSW	6 1/2J	340/A/A	615	300	KH
16	215/55ZR16		97	W	XL	BSW	7J	340/A/A	730	340	KH
17	205/40ZR17		84	W	XL	BSW	7 1/2J	340/A/A	500	340	KH
17	195/45R17		85	V	XL	BSW	6 1/2J	340/A/A	515	340	VN
17	205/45ZR17		88	W	XL	BSW	7J	340/A/A	560	340	KH
17	215/45ZR17		91	W	XL	BSW	7J	340/A/A	615	340	KH
17	225/45ZR17		94	W	XL	BSW	7 1/2J	340/A/A	670	340	KH
17	235/45ZR17		97	W	XL	BSW	8J	340/A/A	730	340	KH
17	245/45ZR17		99	W	XL	BSW	8J	340/A/A	775	340	KH
17	205/50ZR17		93	W	XL	BSW	6 1/2J	340/A/A	650	340	KH
17	215/50R17		95	V	XL	BSW	7J	340/A/A	690	340	KH
17	225/50ZR17		98	W	XL	BSW	7J	340/A/A	750	340	KH
17	235/50ZR17		96	W		BSW	7 1/2J	340/A/A	710	300	KH
17	215/55ZR17		98	W	XL	BSW	7J	340/A/A	750	340	KH
17	225/55R17		101	V	XL	BSW	7J	340/A/A			KH
17	225/55ZR17		101	W	XL	BSW	7J	340/A/A	825	340	KH
18	255/35ZR18		94	W	XL	BSW	9J	340/A/A	670	340	KH
18	265/35ZR18		97	Y	XL	BSW	9 1/2J	340/A/A	730	340	VN
18	215/40ZR18		89	W	XL	BSW	7 1/2J	340/A/A	580	340	VN
18	225/40ZR18		92	W	XL	BSW	8J	340/A/A	630	340	KH
18	235/40ZR18		95	W	XL	BSW	8 1/2J	340/A/A	690	340	KH
18	245/40ZR18		97	Y	XL	BSW	8 1/2J	340/A/A	730	340	KH
18	225/45ZR18		95	W	XL	BSW	7 1/2J	340/A/A	690	340	KH
18	245/45ZR18		100	W	XL	BSW	8J	340/A/A	800	340	KH
18	255/45ZR18		103	W	XL	BSW	8 1/2J	340/A/A	875	340	KH

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
18	225/50ZR18		95	W		BSW	7J	340/A/A	690	300	VN/KH
18	235/50ZR18		97	W		BSW	7 1/2J	340/A/A	730	300	KH
18	245/50ZR18		104	Y	XL	BSW	7 1/2J	340/A/A	900	340	KH
19	265/30ZR19		93	Y	XL	BSW	9 1/2J	340/A/A	650	340	VN
19	275/30ZR19		96	Y	XL	BSW	9 1/2J	340/A/A	710	340	VN
19	235/35ZR19		91	W	XL	BSW	8 1/2J	340/A/A	615	340	KH
19	245/35ZR19		93	W	XL	BSW	8 1/2J	340/A/A	650	340	VN
19	255/35ZR19		96	W	XL	BSW	9J	340/A/A	710	340	KH
19	275/35ZR19		100	W	XL	BSW	9 1/2J	340/A/A	800	340	VN
19	225/40ZR19		93	Y	XL	BSW	8J	340/A/A	650	340	VN
19	235/40R19		96	V	XL	BSW	8 1/2J	340/A/A	710	340	KH
19	245/40ZR19		98	Y	XL	BSW	8 1/2J	340/A/A	750	340	KH
19	255/40R19		100	W	XL	BSW	9J	340/A/A	800	340	KH
19	275/40ZR19		105	Y	XL	BSW	9 1/2J	340/A/A	925	340	VN
19	245/45ZR19		98	W		BSW	8J	340/A/A	750	300	CN/KH
19	255/50R19		107	W	XL	BSW	8J	340/A/A	975	340	KH
20	225/30ZR20		85	Y	XL	BSW	8J	340/A/A	515	340	KH
20	245/30ZR20		90	W	XL	BSW	8 1/2J	340/A/A	600	340	VN
20	275/30ZR20		97	W	XL	BSW	9 1/2J	340/A/A	730	340	VN
20	225/35ZR20		90	W	XL	BSW	8J	340/A/A	600	340	KH
20	245/35ZR20		95	W	XL	BSW	8 1/2J	340/A/A	690	340	KH
20	255/35ZR20		97	W	XL	BSW	9J	340/A/A	730	340	KH
20	275/35ZR20		102	W	XL	BSW	9 1/2J	340/A/A	850	340	VN/KH
20	245/40ZR20		99	Y	XL	BSW	8 1/2J	340/A/A	775	340	VN
20	255/40ZR20		97	W		BSW	9J	340/A/A	730	300	VN/KH
20	245/45ZR20		103	W	XL	BSW	8J	340/A/A	875	340	KH
20	255/45ZR20		105	W	XL	BSW	8 1/2J	340/A/A	925	340	KH
20	275/45ZR20		110	W	XL	BSW	9J	340/A/A	1060	340	VN/KH
20	245/50ZR20		102	W		BSW	7 1/2J	340/A/A	850	300	VN/KH
22	245/30ZR22		92	W	XL	BSW	8 1/2J	340/A/A	630	340	VN



ULTRA HIGH PERFORMANCE

ROAD RACER R1



RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	195/50R15		82	V		BSW	6J	180/AA/A	475	300	CN
15	195/55R15		89	V	XL	BSW	6J	180/AA/A	580	340	CN
17	215/45ZR17		91	W	XL	BSW	7J	180/AA/A	615	340	CN
18	265/35R18		97	W	XL	BSW	9 1/2J	180/AA/A	730	340	CN
18	225/40ZR18		92	W	XL	BSW	8J	180/AA/A	630	340	CN
18	235/40R18		95	W	XL	BSW	8 1/2J	180/AA/A	690	340	CN

- Sport Aesthetics**
High-end product with unique sidewall design; employs curved incisions which fully reflects its sporty and urban look.
- High-Speed Performance**
Wide tread and wave-like central rib design ensure greater high-speed stability.
- Wet Grip**
Sleek and wide shoulder grooves effectively drain water.
- Cornering Performance**
Big shoulder blocks improve stability and handling to meet performance needs.
- Durability**
Curved grooves improve abrasion resistance and the rounded corners on the tread block edges protects the tire from damage.



RHP-780



Wet Performance
Four main grooves effectively drain water for improved traction on wet roads.



All-Season Performance
The tread design and compound evenly distribute ground pressure in all weather conditions to provide excellent driving performance.



Driving Comfort
Unique pattern design effectively reduces tire vibration and noise emissions for increased driving comfort.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
13	155/65R13		73	T		BSW	4.50B	360/A/A	365	300	CN
13	165/65R13		77	T		BSW	5.00B	360/A/A	412	300	CN
13	155/70R13		75	T		BSW	4.50B	360/A/A	387	300	CN
13	165/70R13		79	T		BSW	5.00B	360/A/A	437	300	CN
13	175/70R13		82	T		BSW	5.00B	360/A/A	475	300	CN
13	155/80R13		79	T		BSW	4.50B	360/A/A	437	300	CN
13	165/80R13		83	T		BSW	4.50B	360/A/A	487	300	CN
14	165/60R14		75	H		BSW	5J	360/A/A	387	300	CN
14	175/65R14		82	H		BSW	5J	360/A/A	475	300	CN
14	175/65R14		82	T		BSW	5J	360/A/A	475	300	CN
14	175/65R14		86	T	XL	BSW	5J	360/A/A	530	340	CN
14	165/70R14		81	T		BSW	5J	360/A/A	462	300	CN
14	175/70R14		84	T		BSW	5J	360/A/A	500	300	CN
14	185/70R14		88	H		BSW	5 1/2J	360/A/A	560	300	CN
14	195/70R14		91	H		BSW	6J	360/A/A	615	300	CN
14	195/70R14		91	T		BSW	6J	360/A/A	615	300	CN
15	205/70R15		96	T		BSW	6J	360/A/A	710	300	CN
16	215/60R16		95	V		BSW	6 1/2J	360/A/A	690	300	CN



RHP-780P



Hydroplaning Resistance
Optimal four channel grooves maximize hydroplaning resistance to ensure efficient drainage and greater safety on wet roads.



Stability
The specialized bead design ensures closer contact between the inflated tire and rim to improve driving safety.



Handling
The center rib and enhanced tread block design increases grip and operating stability for greater maneuverability and braking performance. Wet and dry grip is improved due to the wide tire-to-road contact area.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
14	185/55R14		80	V		BSW	6J	400/A/A	450	300	CN
14	185/60R14		82	H		BSW	5 1/2J	400/A/A	475	300	CN
14	155/65R14		75	T		BSW	4 1/2J	400/A/A	387	300	CN
14	165/65R14		79	T		BSW	5J	400/A/A	437	300	CN
14	185/65R14		86	H		BSW	5 1/2J	400/A/A	530	300	CN
14	195/65R14		89	H		BSW	6J	400/A/A	580	300	CN
15	195/50R15		82	H		BSW	6J	400/A/A	475	300	CN
15	195/50R15		82	V		BSW	6J	400/A/A	475	300	CN
15	185/55R15		82	H		BSW	6J	400/A/A	475	300	CN
15	185/55R15		82	V		BSW	6J	400/A/A	475	300	CN
15	195/55R15		85	V		BSW	6J	400/A/A	515	300	CN
15	185/60R15		84	H		BSW	5 1/2J	400/A/A	500	300	CN
15	185/60R15		88	H	XL	BSW	5 1/2J	400/A/A	560	340	CN
15	195/60R15		88	H		BSW	6J	400/A/A	560	300	CN
15	195/60R15		88	V		BSW	6J	400/A/A	560	300	CN
15	205/60R15		91	H		BSW	6J	400/A/A	615	300	CN
15	205/60R15		91	V		BSW	6J	400/A/A	615	300	CN
15	175/65R15		84	H		BSW	5J	400/A/A	500	300	CN
15	175/65R15		84	T		BSW	5J	400/A/A	500	300	CN
15	175/65R15		88	H	XL	BSW	5J	400/A/A	560	340	CN
15	185/65R15		88	H		BSW	5 1/2J	400/A/A	560	300	CN
15	185/65R15		88	T		BSW	5 1/2J	400/A/A	560	300	CN
15	185/65R15		92	T	XL	BSW	5 1/2J	400/A/A	630	340	CN
15	195/65R15		91	H		BSW	6J	400/A/A	615	300	CN
15	195/65R15		91	V		BSW	6J	400/A/A	615	300	CN
15	195/65R15		95	T	XL	BSW	6J	400/A/A	690	340	CN
15	205/65R15		94	V		BSW	6J	400/A/A	670	300	CN
16	195/50R16		88	V	XL	BSW	6J	400/A/A	560	340	CN
16	195/55R16		87	V		BSW	6J	400/A/A	545	300	CN
16	205/55R16		91	H		BSW	6 1/2J	400/A/A	615	300	CN
16	205/55R16		91	V		BSW	6 1/2J	400/A/A	615	300	CN
16	205/55R16		94	V	XL	BSW	6 1/2J	400/A/A	670	340	CN
16	205/60R16		92	H		BSW	6J	400/A/A	630	300	CN
16	205/60R16		92	V		BSW	6J	400/A/A	630	300	CN
16	205/60R16		96	V	XL	BSW	6J	400/A/A	710	340	CN
16	215/65R16		98	H		BSW	6 1/2J	400/A/A	750	300	CN



ALL WEATHER R4S

Safety

New sipe designs greatly improve grip and braking responsiveness.

Driving Comfort

Tread design is optimized for a comfortable drive year-round.

Overall Performance

New groove design pattern greatly improves handling and stability.



Inner Pattern

Improved handling in snow and rain.

Outer Pattern

Handling performance and stability in dry conditions.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
13	155/70R13		75	T		BSW	4.50B	300/A/A	387	300	CN
13	155/80R13		79	T		BSW	4.50B	300/A/A	437	300	CN
14	185/60R14		82	T		BSW	5 1/2J	300/A/A	475	300	CN
14	155/65R14		75	T		BSW	4 1/2J	300/A/A	387	300	CN
14	165/65R14		79	T		BSW	5J	300/A/A	437	300	CN
14	175/65R14		82	T		BSW	5J	300/A/A	475	300	CN
14	185/65R14		86	T		BSW	5 1/2J	300/A/A	530	300	CN
14	165/70R14		85	T	XL	BSW	5J	300/A/A	515	340	CN
14	175/70R14		88	T	XL	BSW	5J	300/A/A	560	340	CN
15	195/50R15		82	H		BSW	6J	300/A/A	475	300	CN
15	185/55R15		82	H		BSW	6J	300/A/A	475	300	CN
15	195/55R15		85	H		BSW	6J	300/A/A	515	300	CN
15	185/60R15		88	H	XL	BSW	5 1/2J	300/A/A	560	340	CN
15	195/60R15		88	H		BSW	6J	300/A/A	560	300	CN
15	175/65R15		84	H		BSW	5J	300/A/A	500	300	CN
15	185/65R15		88	H		BSW	5 1/2J	300/A/A	560	300	CN
15	195/65R15		91	H		BSW	6J	300/A/A	615	300	CN
16	205/45R16		87	V	XL	BSW	7J	300/A/A	545	340	CN
16	195/55R16		87	V		BSW	6J	300/A/A	545	300	CN
16	195/55R16		91	V	XL	BSW	6J		615	340	CN
16	205/55R16		94	V	XL	BSW	6 1/2J	300/A/A	670	340	CN
16	215/55R16		97	V	XL	BSW	7J	300/A/A	730	340	CN
16	205/60R16		96	V	XL	BSW	6J	300/A/A	710	340	CN
16	215/60R16		99	V	XL	BSW	6 1/2J	300/A/A	775	340	CN
17	225/45R17		94	V	XL	BSW	7 1/2J	300/A/A	670	340	CN
17	225/45R17		94	Y	XL	BSW	7 1/2J		670	340	CN
17	205/50R17		93	V	XL	BSW	6 1/2J	300/A/A	650	340	CN
17	225/50R17		98	V	XL	BSW	7J	300/A/A	750	340	CN
17	225/50R17		98	Y	XL	BSW	7J		750	340	CN
18	LT275/65R18	10PR	123/120	R		OWL	8J		1550/1400	550	CN



RWS-677

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
13	175/70R13		82	T		BSW	5.00B		475	300	CN
13	155/80R13		79	T		BSW	4.50B		437	300	CN
14	185/60R14		82	T		BSW	5 1/2J		475	300	CN
14	175/65R14		82	T		BSW	5J		475	300	CN
14	185/65R14		86	T		BSW	5 1/2J		530	300	CN
14	175/70R14		84	T		BSW	5J		500	300	CN
14	185/70R14		88	T		BSW	5 1/2J		560	300	CN



Winter Performance
The tread pattern is designed to improve traction on snow and ice while also reducing noise emissions.



Winter Safety
Tread grooves effectively channel slush, snow, and water out of the tire for improved traction and braking performance.



Winter Grip
The tire stud locations and quantity are optimized to provide effective grip in winter weather conditions.



RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	185/55R15		82	T		BSW	6J		475	300	CN
15	185/60R15		84	T		BSW	5 1/2J		500	300	CN
15	195/60R15		88	T		BSW	6J		560	300	CN
15	175/65R15		84	T		BSW	5J		500	300	CN
15	185/65R15		88	T		BSW	5 1/2J		560	300	CN
15	195/65R15		91	T		BSW	6J		615	300	CN
15	205/65R15		94	T		BSW	6J		670	300	CN
15	205/70R15		96	T		BSW	6J		710	300	CN
15	215/70R15		98	T		BSW	6 1/2J		750	300	CN
15	235/75R15		105	S		BSW	6 1/2J		925	300	CN
16	205/55R16		91	T		BSW	6 1/2J		615	300	CN
16	215/55R16		97	H	XL	BSW	7J		730	340	CN
16	205/60R16		92	T		BSW	6J		630	300	CN
16	215/60R16		95	T		BSW	6 1/2J		690	300	CN
16	225/60R16		98	T		BSW	6 1/2J		750	300	CN
16	205/65R16		95	T		BSW	6J		690	300	CN
16	215/65R16		98	T		BSW	6 1/2J		750	300	CN
16	225/65R16		100	T		BSW	6 1/2J		800	300	CN
16	215/70R16		100	S		BSW	6 1/2J		800	300	CN
16	225/70R16		103	S		BSW	6 1/2J		875	300	CN
16	235/70R16		106	S		BSW	7J		950	300	CN
16	245/70R16		107	S		BSW	7J		975	300	CN
16	LT225/75R16	10PR	115/112	Q		BSW	6J		1215/1120	550	CN
16	245/75R16		111	S		BSW	7J		1090	300	CN
16	LT245/75R16	10PR	120/116	Q		BSW	7J		1380/1260	550	CN
17	215/45R17		91	T	XL	BSW	7J		615	340	CN
17	225/45R17		94	H	XL	BSW	7 1/2J		670	340	CN
17	215/50R17		95	T	XL	BSW	7J		690	340	CN
17	225/50R17		98	H	XL	BSW	7J		750	340	CN
17	215/55R17		94	T		BSW	7J		670	300	CN
17	225/55R17		97	T		BSW	7J		730	300	CN

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
17	235/55R17		99	H		BSW	7 1/2J		775	300	CN
17	215/60R17		96	T		BSW	6 1/2J		710	300	CN
17	225/60R17		99	T		BSW	6 1/2J		775	300	CN
17	235/60R17		102	H		BSW	7J		850	300	CN
17	215/65R17		99	T		BSW	6 1/2J		775	300	CN
17	225/65R17		102	S		BSW	6 1/2J		850	300	CN
17	235/65R17		104	S		BSW	7J		900	300	CN
17	245/65R17		107	S		BSW	7J		975	300	CN
17	265/65R17		112	T		BSW	8J		1120	300	CN
17	245/70R17		110	S		BSW	7J		1060	300	CN
17	LT245/70R17	10PR	119/116	Q		BSW	7J		1360/1250	550	CN
17	265/70R17		115	S		BSW	8J		1215	300	CN
17	LT265/70R17	10PR	121/118	Q		BSW	8J		1450/1320	550	CN
17	LT245/75R17	10PR	121/118	R		BSW	7J		1450/1320	550	CN
18	225/40R18		92	H	XL	BSW	8J		630	340	CN
18	225/45R18		95	T	XL	BSW	7 1/2J		690	340	CN
18	225/55R18		98	T		BSW	7J		750	300	CN
18	235/55R18		100	H		BSW	7 1/2J		800	300	CN
18	255/55R18		105	H		BSW	8J		925	300	CN
18	225/60R18		100	T		BSW	6 1/2J		800	300	CN
18	235/60R18		107	T	XL	BSW	7J		975	340	CN
18	245/60R18		105	T		BSW	7J		925	300	CN
18	265/60R18		110	T		BSW	8J		1060	300	CN
18	235/65R18		106	T		BSW	7J		950	300	CN
18	275/65R18		116	S		BSW	8J		1250	300	CN
18	LT275/65R18	10PR	123/120	R		BSW	8J		1550/1400	550	CN
18	LT275/70R18	10PR	125/122	R		BSW	8J		1650/1500	550	CN
19	255/50R19		107	H	XL	BSW	8J		975	340	CN
19	235/55R19		101	H		BSW	7 1/2J		825	300	CN
20	275/40R20		106	H	XL	BSW	9 1/2J		950	340	CN
20	275/55R20		117	S	XL	BSW	8 1/2J		1285	340	CN




RWT-768



Winter Safety
Multi-angle tread and shoulder grooves divert slush and snow out of the tire for improved overall handling and safety.



Improved Ground Contact
The zigzag center rib improves the tire's ground contact area allowing for better braking performance.



Winter Grip
The high-density of angled sipes are designed to provide maximum traction during acceleration, braking, and turning.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
13	155/70R13		75	T		BSW	4.50B		387	300	CN
13	165/70R13		79	T		BSW	5.00B		437	300	CN
13	165/70R13		83	T	XL	BSW	5.00B		487	340	CN
13	175/70R13		82	T		BSW	5.00B		475	300	CN
13	155/80R13		79	T		BSW	4.50B		437	300	CN
14	185/60R14		82	T		BSW	5 1/2J		475	300	CN
14	155/65R14		75	T		BSW	4 1/2J		387	300	CN
14	175/65R14		82	T		BSW	5J		475	300	CN
14	185/65R14		86	T		BSW	5 1/2J		530	300	CN
14	165/70R14		81	T		BSW	5J		462	300	CN
14	175/70R14		84	T		BSW	5J		500	300	CN
15	185/55R15		82	H		BSW	6J		475	300	CN
15	195/55R15		85	H		BSW	6J		515	300	CN
15	185/60R15		84	T		BSW	5 1/2J		500	300	CN
15	185/60R15		88	T	XL	BSW	5 1/2J		560	340	CN
15	195/60R15		88	H		BSW	6J		560	300	CN
15	175/65R15		84	T		BSW	5J		500	300	CN
15	185/65R15		88	T		BSW	5 1/2J		560	300	CN
15	195/65R15		91	T		BSW	6J		615	300	CN
15	195/65R15		95	T	XL	BSW	6J		690	340	CN
15	205/65R15		94	T		BSW	6J		670	300	CN
16	195/55R16		87	H		BSW	6J		545	300	CN
16	205/55R16		91	H		BSW	6 1/2J		615	300	CN
16	205/55R16		91	T		BSW	6 1/2J		615	300	CN
16	205/55R16		94	H	XL	BSW	6 1/2J		670	340	CN
16	215/55R16		93	H		BSW	7J		650	300	CN
16	225/55R16		99	H	XL	BSW	7J		775	340	CN
16	205/60R16		92	H		BSW	6J		630	300	CN
16	205/60R16		96	H	XL	BSW	6J		710	340	CN
16	215/60R16		95	H		BSW	6 1/2J		690	300	CN
16	225/60R16		98	H		BSW	6 1/2J		750	300	CN
16	215/65R16		98	H		BSW	6 1/2J		750	300	CN
17	225/45R17		94	H	XL	BSW	7 1/2J		670	340	CN
17	225/50R17		98	H	XL	BSW	7J		750	340	CN
17	225/55R17		97	H		BSW	7J		730	300	CN



ROAD QUEST HT



Main Groove Design
The main grooves are designed to efficiently expel water and reduce rolling resistance, thus offering greater fuel economy, high-speed stability, and wet traction.



Greater Comfort
Fine sipe design increases driving comfort on asphalt and concrete roads.



Open Shoulder Design
Improves stability and traction when cornering on wet and dry roads.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	205/70R15		96	H		BSW	6J	440/A/A	710	300	CN
15	235/75R15		105	T		OWL	6 1/2J	500/A/B	925	300	CN
16	235/60R16		100	H		BSW	7J	440/A/A	800	300	CN
16	215/65R16		102	H	XL	BSW	6 1/2J	440/A/A	850	340	CN
16	215/70R16		100	H		BSW	6 1/2J	500/A/B	800	300	CN
16	225/70R16		103	T		OWL	6 1/2J	500/A/B	875	300	CN
16	235/70R16		106	H		BSW	7J	500/A/B	950	300	CN
16	235/70R16		106	T		OWL	7J	500/A/B	950	300	CN
16	245/70R16		111	H	XL	BSW	7J	500/A/B	1090	340	CN
16	245/70R16		111	T	XL	OWL	7J	500/A/B	1090	340	CN
16	255/70R16		111	T		OWL	7 1/2J	500/A/B	1090	300	CN
16	265/70R16		112	T		OWL	8J	500/A/B	1120	300	CN
16	245/75R16		111	T		OWL	7J	500/A/B	1090	300	CN
16	265/75R16		116	T		OWL	7 1/2J	500/A/B	1250	300	CN
17	235/55R17		99	V		BSW	7 1/2J	420/A/A	775	300	CN
17	215/60R17		96	H		BSW	6 1/2J	440/A/A	710	300	CN
17	225/60R17		99	H		BSW	6 1/2J	440/A/A	775	300	CN
17	225/65R17		102	H		BSW	6 1/2J	500/A/B	850	300	CN
17	235/65R17		108	H	XL	BSW	7J	500/A/B	1000	340	CN
17	245/65R17		111	T	XL	OWL	7J	500/A/B	1090	340	CN
17	265/65R17		112	T		BSW	8J	500/A/B	1120	300	CN
17	245/70R17		110	T		OWL	7J	500/A/A	1060	300	CN
17	265/70R17		115	T		OWL	8J	500/A/B	1215	300	CN
18	225/55R18		98	V		BSW	7J	420/A/A	750	300	CN
18	235/55R18		100	V		BSW	7 1/2J	420/A/A	800	300	CN
18	255/55R18		109	Y	XL	BSW	8J	420/A/A	1030	340	CN
18	235/60R18		103	V		BSW	7J	420/A/A	875	300	CN
18	245/60R18		105	H		BSW	7J	500/A/A	925	300	CN
18	265/60R18		110	T		BSW	8J	500/A/A	1060	300	CN
18	255/65R18		111	T		BSW	7 1/2J	500/A/B	1090	300	CN
18	265/65R18		114	T		BSW	8J	500/A/B	1180	300	CN
18	275/65R18		116	T		OWL	8J	500/A/B	1250	300	CN
18	255/70R18		113	T		BSW	7 1/2J	500/A/B	1150	300	CN
19	255/50R19		107	V	XL	BSW	8J	420/A/A	975	340	CN
20	265/50R20		107	V		BSW	8 1/2J	420/A/A	975	300	CN
20	275/55R20		117	T	XL	BSW	8 1/2J	500/A/B	1285	340	CN
20	275/60R20		115	T		OWL	8J	500/A/B	1215	300	CN



MONTARE HT RV08



Handling
The main channel groove design improves grip and driving stability for greater maneuverability and braking performance on various road conditions.



Comfort
Unique pattern design ensures good vibration and noise absorption to increase driving comfort.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	215/75R15		100	S		BSW	6J	460/A/A	800	300	CN
15	235/75R15		105	T		BSW	6 1/2J	460/A/A	925	300	CN
16	235/70R16		106	H		BSW	7J	460/A/A	950	300	CN
17	235/55R17		103	V	XL	BSW	7 1/2J	600/A/A	875	340	CN
17	215/60R17		96	H		BSW	6 1/2J	460/A/A	710	300	CN
17	225/60R17		99	H		BSW	6 1/2J	460/A/A	775	300	CN
17	255/60R17		106	H		BSW	7 1/2J	600/A/A	950	300	CN
17	225/65R17		102	H		BSW	6 1/2J	460/A/A	850	300	CN
17	235/65R17		108	H	XL	BSW	7J	460/A/A	1000	340	CN
18	235/50R18		97	V		BSW	7 1/2J	600/A/A	730	300	CN
18	235/50RF18		97	V		BSW	7 1/2J	600/A/A	730	300	CN
18	215/55R18		95	V		BSW	7J	600/A/A	690	300	CN
18	225/55R18		102	W	XL	BSW	7J	600/A/A	850	340	CN
18	235/55R18		104	W	XL	BSW	7 1/2J	600/A/A	900	340	CN
18	255/55R18		109	V	XL	BSW	8J	600/A/A	1030	340	CN
18	255/55RF18		105	H		BSW	8J	600/A/A	925	300	CN
18	225/60R18		100	H		BSW	6 1/2J	600/A/A	800	300	CN
18	235/60R18		103	V		BSW	7J	460/A/A	875	300	CN
19	235/50R19		103	W	XL	BSW	7 1/2J	600/A/A	875	340	CN
19	255/50R19		103	V		BSW	8J	600/A/A	875	300	CN
19	255/50RF19		103	V		BSW	8J	600/A/A	875	300	CN
19	235/55R19		101	W		BSW	7 1/2J	600/A/A	825	300	CN
19	245/55R19		103	V		BSW	7 1/2J	600/A/A	875	300	CN



ON/OFF ROAD PICKUP & SUV



ROAD QUEST AT

Strong Sidewall
Wide running surface ensures superior traction performance on all types of road surfaces.




RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	31×10.50R15LT	6PR	109	S		OWL	8 1/2J		1030	350	VN
16	245/70R16		107	S		OWL	7J	500/A/B	975	300	VN
16	265/70R16		112	T		OWL	8J	500/A/B	1120	300	VN
17	265/65R17		112	S		OWL	8J	500/A/B	1120	300	VN
18	265/60R18		110	T		RWL	8J	500/A/B	1060	300	VN
18	265/60R18		110	T		BSW	8J	500/A/B	1060	300	VN
20	265/50R20		111	T	XL	RWL	8 1/2J	500/A/B	1090	340	VN
20	265/50R20		111	T	XL	BSW	8 1/2J	500/A/B	1090	340	VN
20	275/55R20		117	T	XL	RWL	8 1/2J	500/A/B	1285	340	VN
20	275/55R20		117	T	XL	BSW	8 1/2J	500/A/B	1285	340	VN

1 Shoulder Design
Wide shoulder grooves and nodules within the tread grooves effectively eject mud, sand, gravel, and other debris to improve grip.

2 Climbing Performance
Tread blocks maintain a staggered bite to improve traction and climbing ability.

3 Traction Performance
Lengthened tread shoulder employs a multi-layered protruding design that improves strength and prevents damage to the carcass, allowing for a safe off-roading experience.

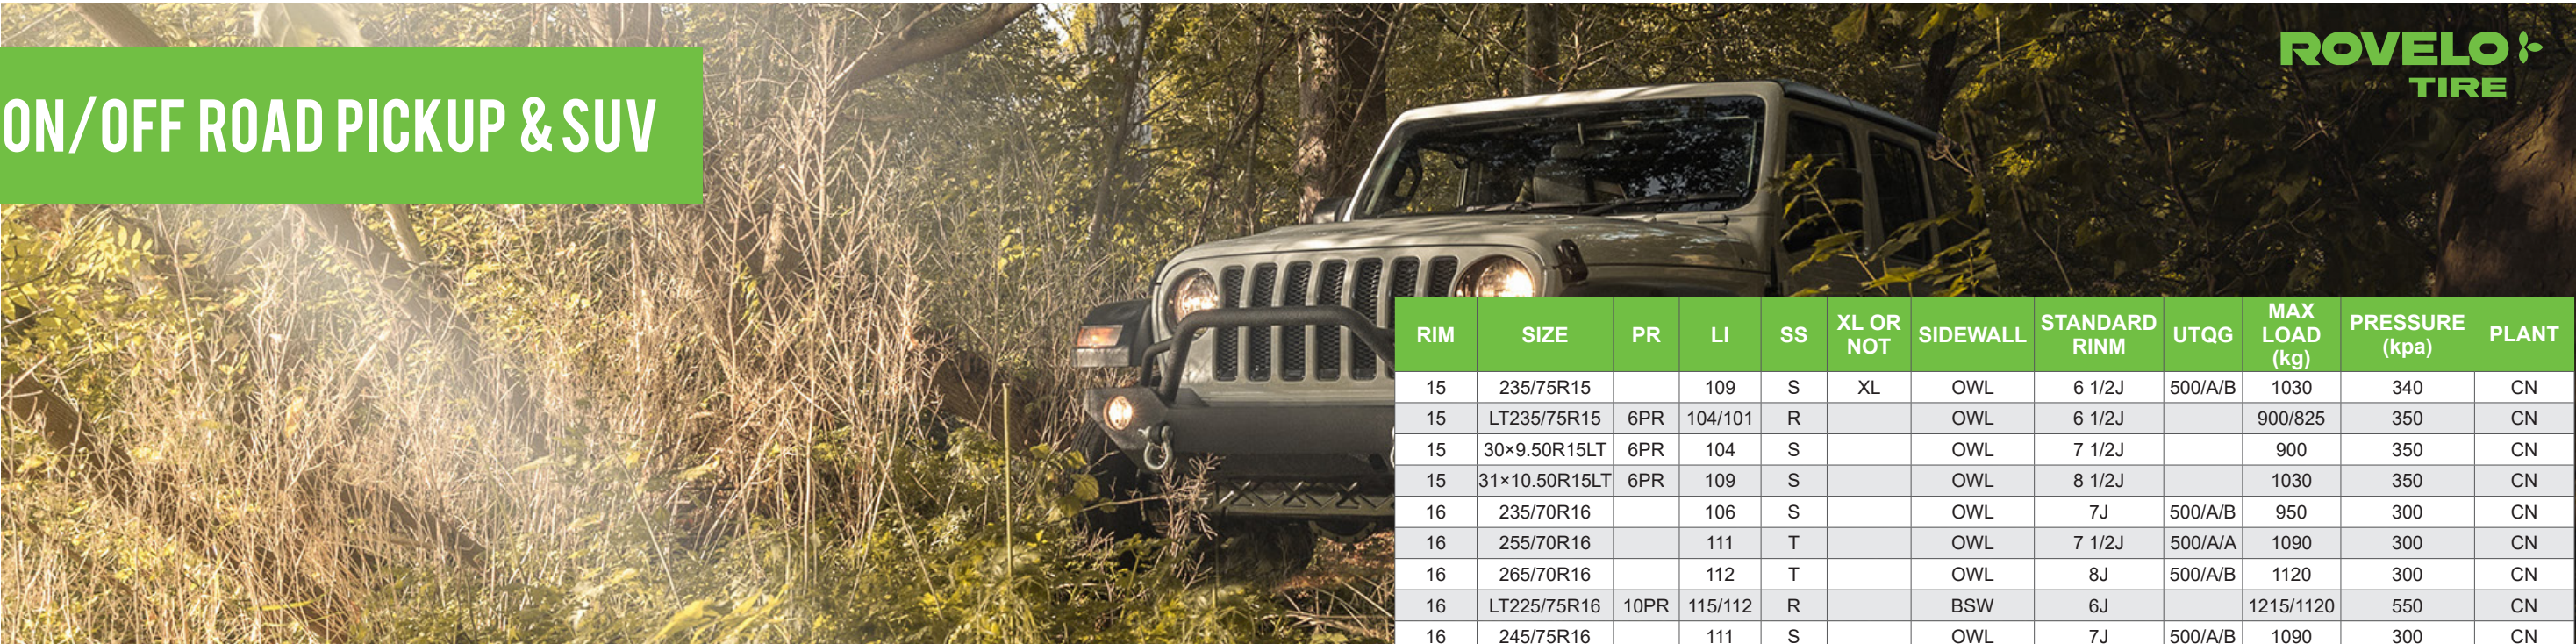

RIDGETRAK AT



The NEW RIDGETRAK AT 3PMS is designed to deliver superior traction for SUVs, pickups and vans both off and on the road. The NEW RIDGETRAK AT 3PMS provides the same exceptional handling, on-and-off-road stability and quiet, comfortable ride as the original RIDGETRAK AT with the added bonus that it is winter tire tested and approved!



Versatile Applications

The aggressive open shoulder design efficiently expels snow, water, slush, and mud for optimum traction on all-terrain conditions.



Grip and Traction

The serrated tread block design provides excellent grip and traction on various road conditions.



Comfort

Solid center rib and read block sipes offer greater handling and comfort.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	235/75R15		109	S	XL	OWL	6 1/2J	500/A/B	1030	340	CN
15	LT235/75R15	6PR	104/101	R		OWL	6 1/2J		900/825	350	CN
15	30×9.50R15LT	6PR	104	S		OWL	7 1/2J		900	350	CN
15	31×10.50R15LT	6PR	109	S		OWL	8 1/2J		1030	350	CN
16	235/70R16		106	S		OWL	7J	500/A/B	950	300	CN
16	255/70R16		111	T		OWL	7 1/2J	500/A/A	1090	300	CN
16	265/70R16		112	T		OWL	8J	500/A/B	1120	300	CN
16	LT225/75R16	10PR	115/112	R		BSW	6J		1215/1120	550	CN
16	245/75R16		111	S		OWL	7J	500/A/B	1090	300	CN
16	LT245/75R16	10PR	120/116	S		OWL	7J		1380/1260	550	CN
16	265/75R16		116	S		OWL	7 1/2J	500/A/B	1250	300	CN
16	LT265/75R16	10PR	123/120	S		OWL	7 1/2J		1550/1400	550	CN
16	LT285/75R16	10PR	126/123	R		OWL	8J		1700/1550	550	CN
16	LT235/85R16	10PR	120/116	R		BSW	6 1/2J		1380/1260	550	CN
17	235/65R17		104	S		OWL	7J	500/A/B	900	300	CN
17	245/65R17		107	S		OWL	7J	500/A/B	975	300	CN
17	265/65R17		112	S		OWL	8J	500/A/B	1120	300	CN
17	285/65R17		116	T		OWL	8 1/2J		1250	300	CN
17	245/70R17		110	T		OWL	7J	500/A/B	1060	300	CN
17	LT245/70R17	10PR	119/116	S		OWL	7J		1360/1250	550	CN
17	265/70R17		115	S		OWL	8J	500/A/B	1215	300	CN
17	LT265/70R17	10PR	121/118	S		OWL	8J		1450/1320	550	CN
17	LT285/70R17	10PR	121/118	R		OWL	8 1/2J		1450/1320	550	CN
17	LT245/75R17	10PR	121/118	S		OWL	7J		1450/1320	550	CN
17	LT235/80R17	10PR	120/117	R		OWL	6 1/2J		1400/1285	550	CN
18	235/60R18		107	T	XL	BSW	7J	500/A/A	975	340	CN
18	LT285/60R18	8PR	118/115	S		OWL	8 1/2J		1320/1215	450	CN
18	265/65R18		114	T		OWL	8J	500/A/B	1180	300	CN
18	275/65R18		116	T		OWL	8J	500/A/B	1250	300	CN
18	LT275/65R18	10PR	123/120	R		OWL	8J		1550/1400	550	CN
18	LT265/70R18	10PR	124/121	R		BSW	8J		1600/1450	550	CN
18	LT275/70R18	10PR	125/122	R		OWL	8J		1650/1500	550	CN
19	255/55R19		111	H	XL	BSW	8J	500/A/A	1090	340	CN
20	265/50R20		111	T	XL	OWL	8 1/2J	500/A/B	1090	340	CN
20	275/55R20		117	T	XL	BSW	8 1/2J	500/A/B	1285	340	CN
20	LT275/55R20	10PR	120/117	S		OWL	8 1/2J		1400/1285	550	CN
20	LT305/55R20	10PR	121/118	R		BSW	9 1/2J		1450/1320	450	CN
20	LT265/60R20	10PR	121/118	R		BSW	8J		1450/1320	550	CN
20	275/60R20		115	T		BSW	8J	500/A/B	1215	300	CN
20	LT275/60R20	10PR	123/120	R		BSW	8J		1550/1400	550	CN
20	LT325/60R20	10PR	126/123	R		OWL	9 1/2J		1700/1550	450	CN
20	LT275/65R20	10PR	126/123	R		BSW	8J		1700/1550	550	CN



ROAD QUEST RMT810



Off-Road Performance

The z-shaped grooves between blocks is designed to enhance off-road driving capabilities by improving grip and climbing ability.



Off-Road Grip

Deep grooves allows mud to easily be discharged from the tread at both high and low speeds. The design also offers better grip when traveling on rocky or rugged roads.



Off-Road Stability

Large blocks on the shoulder vastly enhance handling on muddy and rocky roads.



Off-Road Durability

The shield pattern which extends from the sidewall protects the sidewall from abrasions and increase traction in mud. The carcass is designed with three layers of polyester fabric to make it rugged and resistant to strong impacts.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
15	31×10.50R15LT	6PR	109	Q		OWL	8 1/2J		1030	350	CN
16	LT265/70R16	10PR	121/118	Q		OWL	8J		1450/1320	550	CN
16	LT245/75R16	10PR	120/116	Q		OWL	7J		1380/1260	550	CN
16	LT265/75R16	10PR	123/120	Q		OWL	7 1/2J		1550/1400	550	CN
17	LT265/65R17	10PR	120/117	Q		OWL	8J		1400/1285	550	CN
18	LT265/65R18	8PR	117/114	Q		OWL	8J		1285/1180	450	CN



COMMERCIAL

RCM-836



Three Channel Zigzag Grooves
Maximizes traction and water drainage in wet conditions.



Multi-Angle Sipe System
Sipes provide superior traction in snow and mud.



Full-Depth Acoustic Channels
Reduces vibrations to maximize passenger comfort.



Extra Wide Shoulders
Minimizes irregular wear and improves high-speed stability.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
14	175/65R14C	6PR	90/88	T		BSW	5J		600/560	375	CN
14	165/70R14C	6PR	89/87	T		BSW	5J		580/545	375	CN
15	205/65R15C	6PR	102/100	T		BSW	6J		850/800	375	CN
15	195/70R15C	8PR	104/102	R		BSW	6J		900/850	450	CN
15	195/70R15C	8PR	104/102	T		BSW	6J		900/850	450	CN
15	205/70R15C	8PR	106/104	R		BSW	6J		950/900	450	CN
15	205/70R15C	8PR	106/104	T		BSW	6J		950/900	450	CN
15	215/70R15C	8PR	109/107	R		BSW	6 1/2J		1030/975	450	CN
15	215/70R15C	8PR	109/107	T		BSW	6 1/2J		1030/975	450	CN
15	225/70R15C	8PR	112/110	R		BSW	6 1/2J		1120/1060	450	CN
15	225/70R15C	8PR	112/110	T		BSW	6 1/2J		1120/1060	450	CN
16	195/60R16C	6PR	99/97	H		BSW	6J		775/730	375	CN
16	195/65R16C	8PR	104/102	T		BSW	6J		900/850	475	CN
16	205/65R16C	8PR	107/105	T		BSW	6J		975/925	475	CN
16	215/65R16C	8PR	109/107	R		BSW	6 1/2J		1030/975	475	CN
16	215/65R16C	8PR	109/107	T		BSW	6 1/2J		1030/975	475	CN
16	225/65R16C	8PR	112/110	R		BSW	6 1/2J		1120/1060	475	CN
16	225/65R16C	8PR	112/110	T		BSW	6 1/2J		1120/1060	475	CN
16	235/65R16C	8PR	115/113	T		BSW	7J		1215/1150	475	CN
16	215/70R16C	6PR	108/106	T		BSW	6 1/2J		1000/950	375	CN
16	195/75R16C	8PR	107/105	Q		BSW	5 1/2J		975/925	475	CN
16	195/75R16C	8PR	107/105	T		BSW	5 1/2J		975/925	475	CN
16	205/75R16C	8PR	110/108	R		BSW	5 1/2J		1060/1000	475	CN
16	205/75R16C	8PR	110/108	T		BSW	5 1/2J		1060/1000	475	CN
16	215/75R16C	8PR	113/111	R		BSW	6J		1150/1090	475	CN
16	215/75R16C	8PR	113/111	T		BSW	6J		1150/1090	475	CN



COMMERCIAL

ROVELO
TIRE

RCM-X+



Closed Shoulder Design
Enhances handling performance and promotes even wear.



Improved Handling and Lifetime
The closed shoulder design helps to improve overall handling and promote even wear for a longer tread life.



Wet Performance
The sipe design is optimized to improve handling and traction in wet weather conditions for greater overall safety.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
12	155R12C	8PR	88/86	N		BSW	4.50B		560/530	450	VN
13	155R13C	8PR	90/88	N		BSW	4 1/2J		600/560	450	VN
13	165R13C	8PR	94/93	P		BSW	4 1/2J		670/650	450	VN
14	185R14C	8PR	102/100	Q		BSW	5 1/2J		850/800	450	CN/VN
14	195R14C	8PR	106/104	Q		BSW	5 1/2J		950/900	450	CN/VN
15	195/70R15C	8PR	104/102	R		BSW	6J		900/850	450	VN
15	225/70R15C	8PR	112/110	R		BSW	6 1/2J		1120/1060	450	VN
15	195/80R15C	8PR	108/106	S		BSW	5 1/2J		1000/950	475	CN
15	195R15C	8PR	106/104	S		BSW	5 1/2J		950/900	450	CN/VN
16	195/75R16C	10PR	110/108	Q		BSW	5 1/2J		1060/1000	525	VN
16	215/75R16C	10PR	116/114	R		BSW	6J		1250/1180	525	VN




MONTARE LT RL02



Extended Tire Life
The closed shoulder design combined with a wear resistant tread compound effectively improve handling performance and improve wear resistance for a longer tread life.



Wet Grip
The varied central and outer groove designs effectively expel water for better traction on wet roads.



Safety and Durability
The strengthened nylon caps and sturdy belt layers effectively improve safety and durability in extreme driving applications.

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RINM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)	PLANT
14	165R14C	8PR	96/95	S		BSW	4 1/2J		710/690	450	CN

NOTES

[illegible]

NOTES

[illegible]